

Click [HERE](#) to return to the Table of Contents

S A A M I



SPORTING ARMS AND AMMUNITION MANUFACTURERS' INSTITUTE, INC.

Since 1926

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

32 AUTOMATIC

CARTRIDGE
UNLESS OTHERWISE NOTED
BODY DIA $-.006$ (0.15)

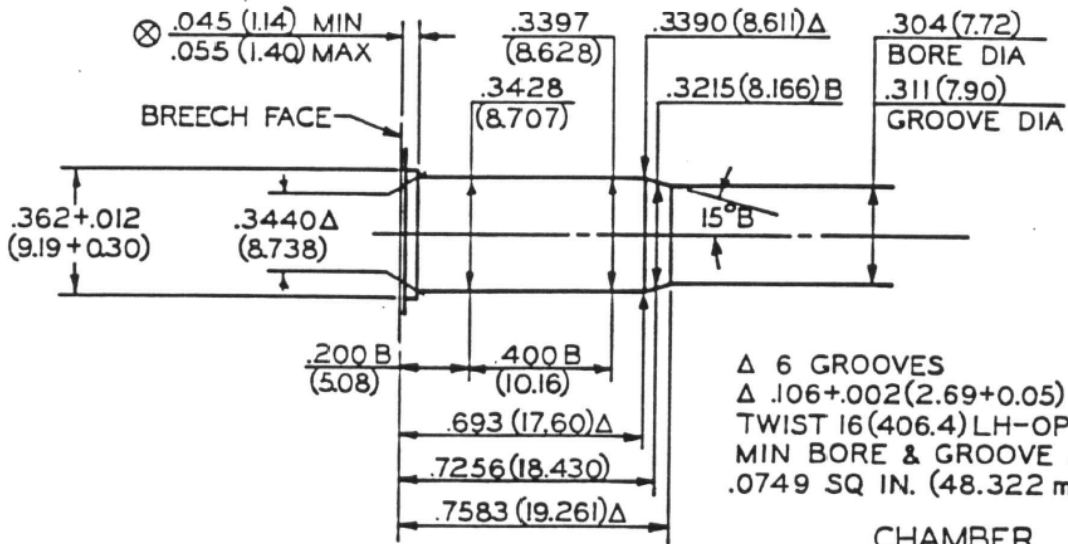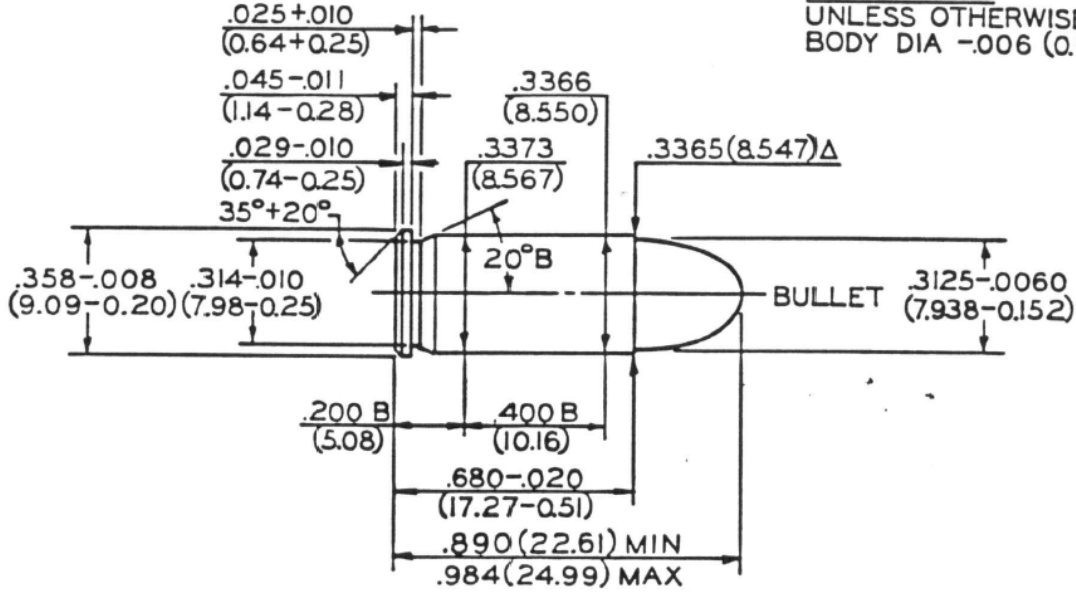

Δ 6 GROOVES
Δ $.106+0.002$ (2.69+0.05) WIDE
TWIST 16 (406.4) LH-OPTIONAL
MIN BORE & GROOVE AREA
 $.0749$ SQ IN. (48.322 mm²)

CHAMBER
UNLESS OTHERWISE NOTED
ALL DIA $+.004$ (0.10)
LENGTH TOL $+.015$ (0.38)

NOTE

B = BASIC

(XX.XX) = MILLIMETERS

⊗ = HEADSPACE DIMENSION

Δ = REFERENCE DIMENSION

* DIMENSIONS ARE TO INTERSECTION OF LINES

ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)

COPYRIGHT © SPORTING ARMS AND AMMUNITION MANUFACTURERS' INSTITUTE, INC. ("SAAMI"). ALL RIGHTS RESERVED.
Reproduction, republication or redistribution of SAAMI technical drawings and data sheets in any manner, in whole or in part, without SAAMI's prior written consent is prohibited.